

# drape

## Instructions for Use



**OKamura**


OKAMURA CORPORATION  
International Sales & Marketing Div.  
<https://www.okamura.com>


GTX996 / 2020-09

**OKamura**

## Safety Instructions (Make sure to follow these instructions)

This Instruction Manual and indications on the products use various types of symbols to help you safely and correctly use the products, preventing you, people nearby, and properties from being damaged. The symbols mean as shown below. Make sure to understand the meaning of the symbols well before reading the instructions.

 **Caution** This indicates that improper handling may cause injury or property damage.

 **Prohibit** This indicates what should not be done when you handle the product.

### Caution



Pay attention to the following to prevent the product from falling to cause you to get injured or damage to the product.

- Do not hang on or lean on to the panel.
- Do not put any items on the panel.



Pay attention to the following to prevent falling from causing you to get injured or damage to the product.

- Do not seat or stand on the tabletop.
- Do not step/stand on the tabletop.



Do not put your fingers or hands into the spaces or moving parts of the product. This may lead to injuries.



Pay attention to the following not to cause you to get injured or damage to the product.

- Do not handle roughly, or use improperly.
- If found any loose bolts or screws, do not use the product.
- Do not use if any parts come off.
- Do not use any faulty products.

## Safety Instructions (Make sure to follow these instructions)

### Prohibit



Do not repair or remodel the product by yourself. Failure may cause a malfunction or accident.

- Remodeling by yourself may cause not only a malfunction, but also a critical accident. We are not liable for any remodeled products.
- Repair by yourself is very risky. If you find any abnormalities, contact our dealer or Customer Service.

### Installation

Please follow instructions below. Failure may cause serious damage to the product and Okamura will have no responsibility for any damages.

#### Indoor use only.

- No outdoor or waterfront use.

Do not place product under heater or air-conditioner exhausting high temperature air.

Avoid high temperature, high humidity, or extraordinary aridity.

#### Avoid direct sunlight

- When placing alongside windows, use curtains or blinds to avoid direct sunlight.

Moving this product requires disassembly. Never disassemble the product by yourself. Failure may cause not only a malfunction, but also a critical accident. When you need to move this product, contact our dealer or Customer Service.

### Appropriate Ventilation Measures

- Many chemical substances will be released by the product when it is first purchased. Sufficiently ventilate or expose the product to moving air for some time after purchasing it.
- Do not completely close windows when using the product in rooms with conspicuously high temperatures/ humidity (the benchmarks for these are temperatures in excess of 28°C (82.4°F) and relative humidity in excess of 50%).

## For daily care

### Panel (surface materials) [Polyester or polyester/cotton]

- Brush with a soft brush or tap the surface softly and vacuum to remove dust to avoid damaging the cloth.
- When it gets dirty after extended period of time, wipe with a well wrung soft cloth moistened with thin neutral detergent. Wipe clean with a damp cloth. Be sure to wipe detergent completely and wipe again with a dry cloth to dry it.
- When using alkaline electrolyzed water to remove stains, spray directly on the stain and brush with a soft brush taking care not to damage the cloth. Then, wipe the moisture and stain to remove and wait for the cloth to dry.
- Remove stains as quickly as possible.
- Avoid causing a circular stain, remove not only the stain but also wipe off thoroughly around the stain.
- If you use a cleaning agent, make sure to confirm that discoloration or other phenomena will not occur by applying a small amount of the agent to an unnoticeable portion in advance.
- Dirt may not be removed depending on the condition.


### Wall light cover, tabletop bracket, etc. [Steel]

- Wipe with a dry, soft cloth.
- When it gets exceptionally dirty, wipe off the dirt with a well wrung soft cloth moistened with thin neutral detergent. Be sure to wipe off detergent completely with a damp cloth and wipe again with a dry cloth to dry it.
- Remove stains as quickly as possible.
- Dirt may not be removed depending on the condition.

### Tabletop (surface material) [HPL]

- Wipe with a well wrung soft cloth moistened.
- When it gets exceptionally dirty, wipe off the dirt with a well wrung soft cloth moistened with thin neutral detergent. Be sure to wipe off detergent completely with a damp cloth and wipe again with a dry cloth to dry it.
- Remove stains as quickly as possible.
- Dirt may not be removed depending on the condition.

## Parts Name

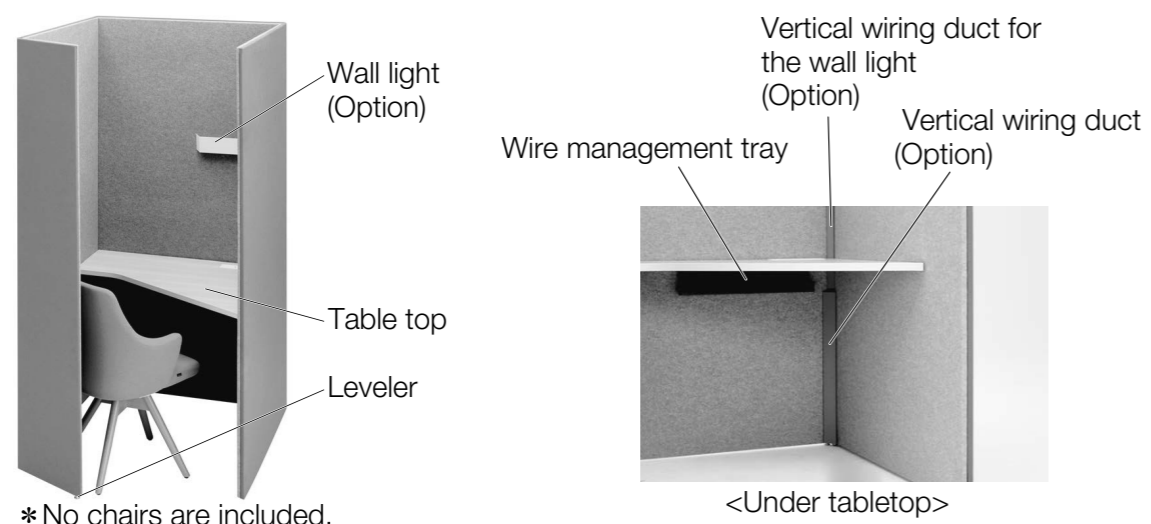

**Caution**

We recommend using a non-caster chair for Tetra and Penta..  
Since the inside of each booth is compact, moving a caster chair may cause the panels to be hit to be damaged, get dirty, or broken.

## Option (North American model)

### Power accessory

A power unit can be attached underneath the tabletop at your preferred location.  
(Screw-fixed to tabletop bottom side)



#### Electrical specifications

Voltage rating: 125V  
Rating capacity: 15A  
Rated frequency: 60Hz  
\*UL listed for upholding strict safety standards.



#### Electrical specifications


Dual USB-A: (2)10W USB-A ports  
USB A+C: (1)10W USB-A, (1)15W USB-C  
36W-power supply  
Voltage rating: 125V  
Rating capacity: 15A  
Rated frequency: 60Hz  
\*UL listed for upholding strict safety standards.

### Wall light

The optional wall lighting is soft enough to be easy on your eyes, while still aiding work.  
The wall light is available with downlight only or with both uplight and downlight.



Tri/Tetra

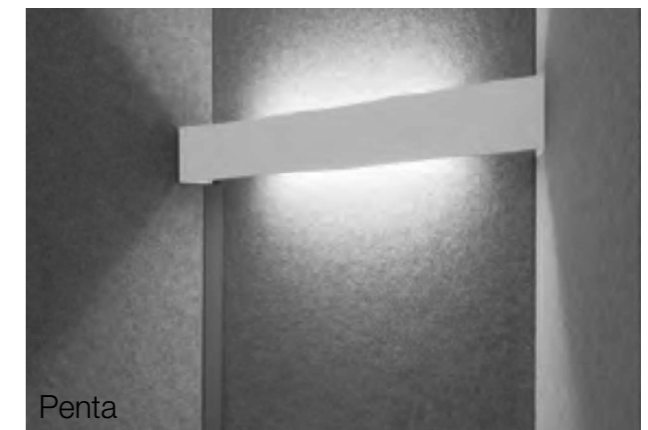

Penta

#### Light specifications

Power consumption: 5.0W(Stand alone), 9.4W(Daisy-chained)  
Color temperature: 3500K  
Color rendering index: 85  
Switch: Capacitive touch sensor (Master control for Daisy-chained kit)  
Brightness adjustability: 100% - 15% continuous; w/last state memory  
Automatic turn off: After 12 hours (±15 mins)  
\*ETL listed for upholding strict safety standards.

## Maximum loading capacity

items	Maximum loading capacity
Tabletop	50 kg(110lb) (uniformly distributed weight)

\*What is "Uniformly distributed weight" ?

It means to load on a work surface, etc. evenly. Uneven loading on the product may cause balance loss and thus drop or fall.

## Materials and Surface Finish

	Parts	Materials	Surface Finish
Panel	Surface material (Inter lock)	Polyester, Cotton	—
	Surface material (Felt)	Polyester	—
	Core material	Glass wool	—
	Structure	Steel	—
Leveler	Body	Steel	Black zinc plated
Tabletop	Surface materials	High pressure laminate(Melamine resin, Phenolic resin, Paper)	—
	Core material	MDF	—
	Edge	ABS resin	—
Wall light cover Tabletop bracket Vertical wiring duct Wire management tray	Body	Steel	Powder coated

\*Please understand that product specifications might change without prior notification due to improvements made to the product.