

Multi-purpose Stool

# Lives Pouf LW Pouf

Instructions for Use



**OKamura**

OKAMURA CORPORATION  
International Sales & Marketing Div.  
<https://www.okamura.com>

H00368 / 2020-09

**OKamura**


## Safety Instructions (Make sure to follow these instructions)

**⚠ Caution** This indicates that improper handling may cause injury or property damage.

### ⚠ Caution

Do not handle roughly, or use improperly. Failure to follow the safety precautions cause injury or damage to the product may

- Do not use this stool as a step stool or load carrier.
- Do not sit on other than the seat.
- Do not stand on or lean to the stool. Do not sit on the stool in an unstable posture or on the front edge portion of the seat.
- Do not swing the stool while lifting it.

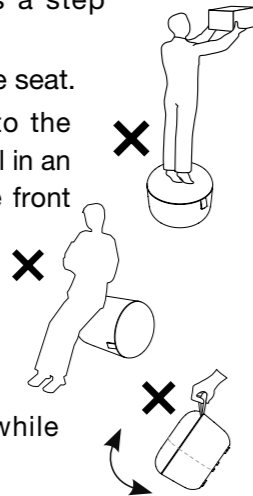

Do not put your fingers or hands into the spaces or moving parts of the product. This may lead to injuries.

Be careful of the following items since it may cause injury or damage the product.

- If found unstable due to loosening of bolts or screws, retighten them.
- Do not use if any parts come off.

Do not reconfigure. This leads to malfunction or accident.

- Reconfiguring by yourself causes the product to malfunction or accident. Okamura will have no responsibility for any disadvantages caused by remodeling.
- If you need remodeling, contact our official dealers beforehand.

Do not disassemble or repair on your own.

- Do not attempt to disassemble or repair the product yourself. Please contact our official dealers when needed.
- If found any loose bolts or screws, do not use the product. Failure may cause damage to the product and result in injury.
- Do not move the stool with equipment connected. Failure may cause disconnection.

## Installation

Please follow instructions below. Failure may cause serious damage to the product and Okamura will have no responsibility for any damages.

**Indoor use only.**

- No outdoor or waterfront use.

Avoid high temperature, high humidity, or extraordinary aridity.

Do not place product under heater or airconditioner exhausting high temperature air.

**Avoid direct sunlight**

- When placing alongside windows, use curtains or blinds to avoid direct sunlight.


**Do not place on uneven floor.**

- Make sure to place the product on an even floor when using. Failure may cause the product to deform or to be damaged.

## Appropriate Ventilation Measures

- Many chemical substances will be released by the product when it is first purchased. Sufficiently ventilate or expose the product to moving air for some time after purchasing it.
- Do not completely close windows when using the product in rooms with conspicuously high temperatures/humidity (the benchmarks for these are temperatures in excess of 28°C (82.4°F) and relative humidity in excess of 50%).

## Parts Names and Dimensions

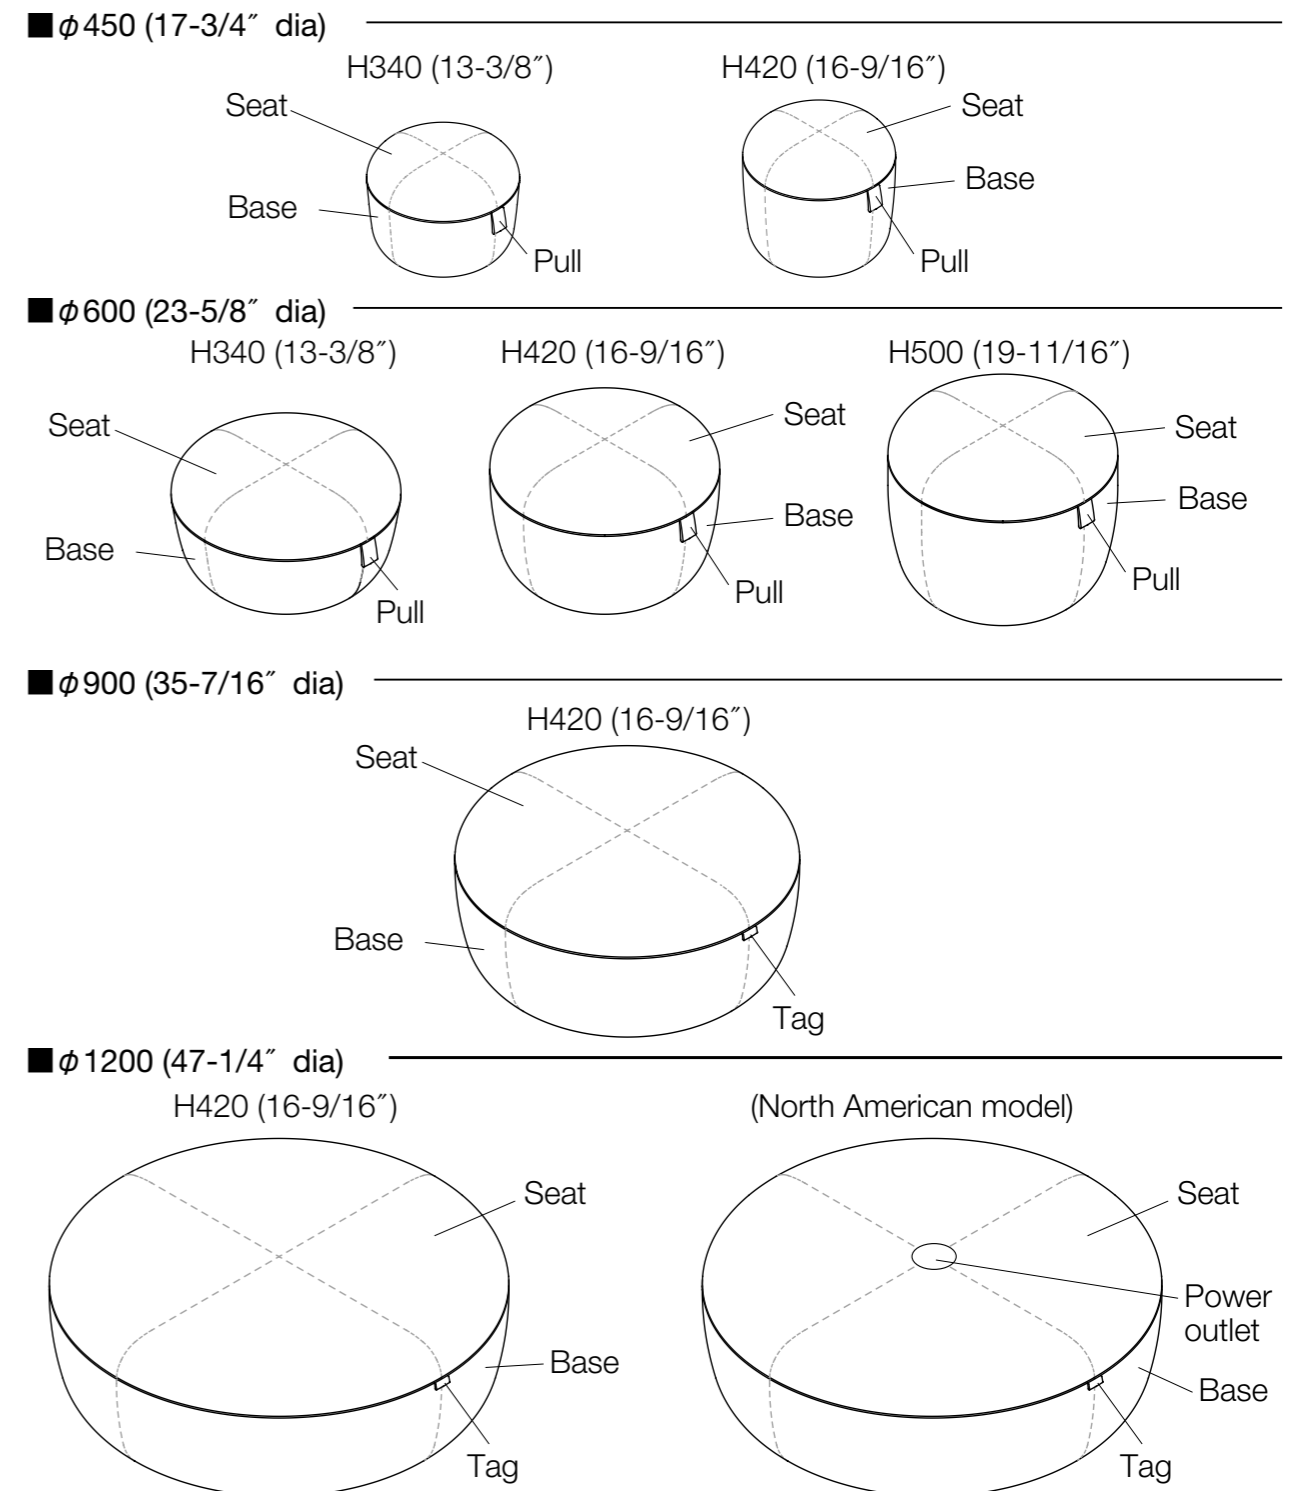


## Operation Guide

### ■ Pull

The  $\phi 450$  (17-3/4" dia) and  $\phi 600$  (23-5/8" dia) stools are provided with a pull, and can be easily moved.


Put your fingers into the pull, and pull it.

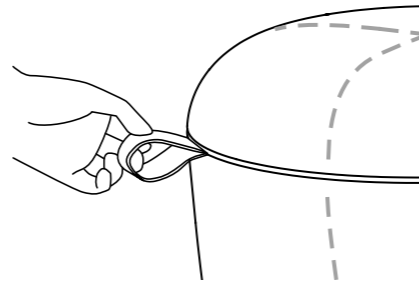

### ⚠ Caution

•Do not place any heavy or fragile items on the seat. Do not move the stool with any items on it. The item may fall to cause you to get injured or damage to the product.


### ■ Power accessory (North American model)

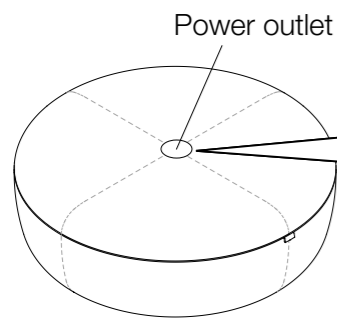

#### ● Round rotate opening lid

Open

Closed

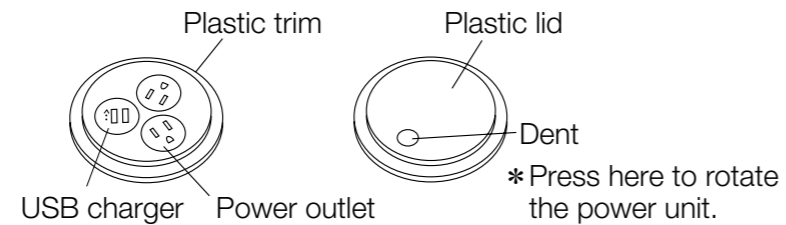

Electrical specifications

Voltage rating: 125V

Rating capacity: 15A

Rated frequency: 60Hz

\*UL listed for upholding strict safety standards.

## Main Materials

Part	Applicable model	Materials
Seat	All models	Polyurethane foam
	All models	Polypropylene
Base	$\phi 450/\phi 600$ (17-3/4" dia/23-5/8" dia)	Polyurethane foam
	$\phi 900/\phi 1200$ (35-7/16" dia/47-1/4" dia)	Plywood, Polyurethane foam
Glide	$\phi 450/\phi 600$ (17-3/4" dia/23-5/8" dia)	Nylon, Polyethylene
	$\phi 900/\phi 1200$ (35-7/16" dia/47-1/4" dia)	ABS, Polyethylene
Pull, Tag	All models	Leather(bull leather)
Cover fabric	Interlock	Polyester, Cotton
	Twill	Polyester

\*Please understand that product specifications might change without prior notification due to improvements made to the product.

## Instructions to Extend the Life of Product

Please follow instructions below. Failure may cause serious damage to the product and Okamura will have no responsibility for any damages.

### Operating Precautions and Maintenance

- If the product has become unsteady due to loosening of the bolts or screws during use, retighten them immediately.
- Avoid direct exposure to steam. Failure will cause rust.
- Wipe off any water on the Worktop with a dry and soft cloth.
- Immediately wipe off tea, coffee, detergent, chemical, etc. if any spilled.
- This instruction manual is very important, so store it in an easily accessible location.
- Regular maintenance is recommended for long-life use. Make your request to us early for inspections and repairs (fees required) when the warranty period has expired.

### Maintenance

#### Cloth part

- Brush with a soft brush or tap the surface softly and vacuum to remove dust to avoid damaging the cloth.
- When it gets dirty after extended period of time, wipe with a well wrung soft cloth moistened with thin neutral detergent. Wipe clean with a damp cloth. Be sure to wipe detergent completely and wipe again with a dry cloth to dry it.
- When using alkaline electrolyzed water to remove stains, spray directly on the stain and brush with a soft brush taking care not to damage the cloth. Then, wipe the moisture and stain to remove and wait for the cloth to dry.
- When it gets an oily stain, dab and remove it by using a dedicated stain remover immediately. Then wipe with a soft cloth dampened with water, followed by a dry cloth to dry. Stains may be permanent depending on the material .

#### <Caution>

- Remove stains as quickly as possible.
- Avoid causing a circular stain, remove not only the stain but also wipe off thoroughly around the stain.
- Try the cleaner on inconspicuous area first since the surface may discolor or deteriorate by using it.

#### Resin part

- Wipe with a well wrung soft cloth moistened.
- If dirt is noticeable, wipe it off with a well wrung soft cloth moistened with thin neutral detergent. Be sure to remove detergent completely with a damp cloth and wipe again with a dry cloth to dry it.

#### <Caution>

- Do not use the following items which will damage the coating.
  - Thinner, benzene, alcohol, lacquer, oil, vinegar, boiling water, polishing powder, etc.